





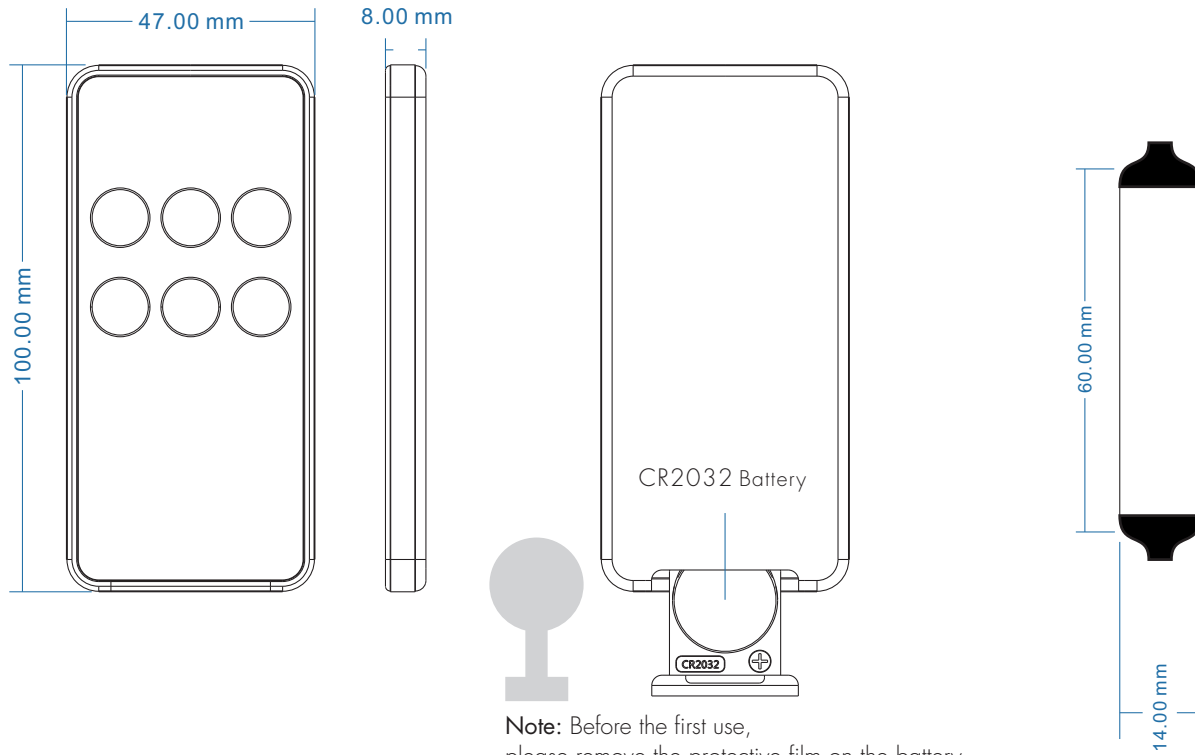

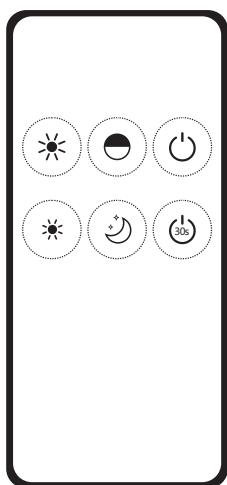

114466 | SYS-PRO SINGLECOLOR 1 ZONEN FERNBEDIENUNG + PWM-DIMMER, 1 KANAL, 12-24V DC 3A

Dimension



Remote function




-  On/Off
-  Turn off light after 30s, long press 2s will turn off light after 60s.
-  50% brightness
-  10% brightness for small night light
-  Brightness+
-  Brightness-

Brightness+/-:

Short press 10 levels, long press 1-6s for continuous 256 levels adjustment.

114466 | SYS-PRO SINGLECOLOR 1 ZONEN FERNBEDIENUNG + PWM-DIMMER, 1 KANAL, 12-24V DC 3A

Wiring diagram

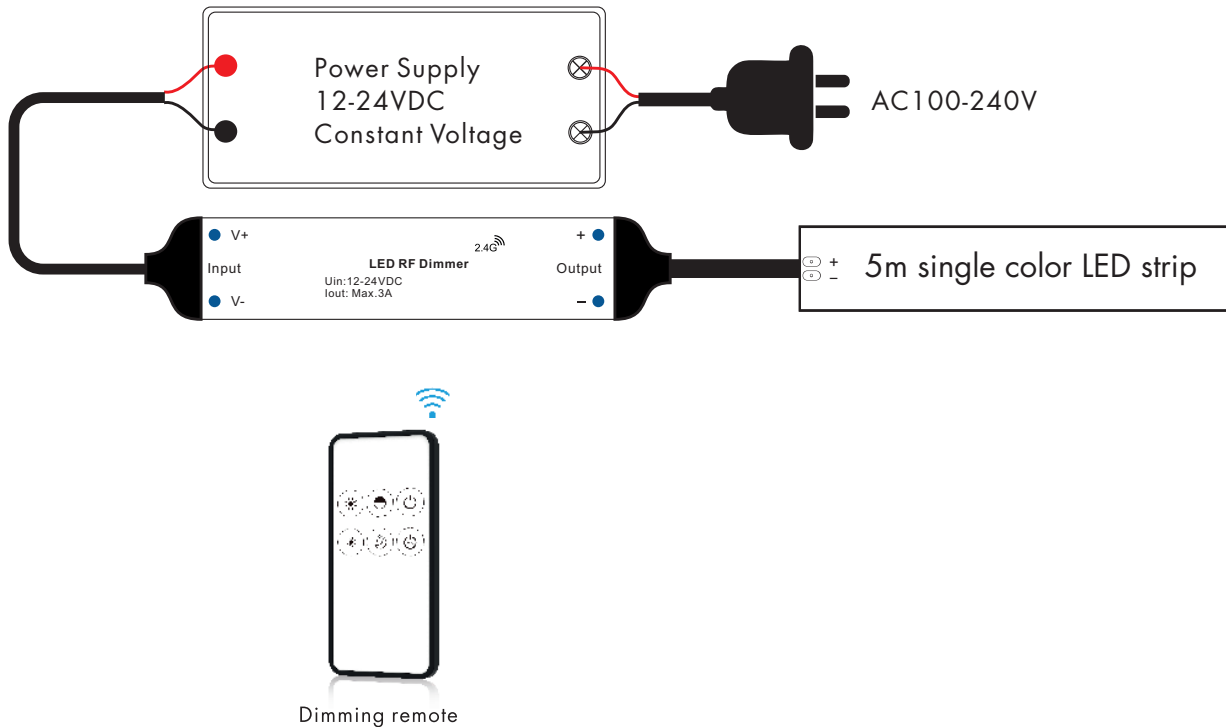

Match guide

Match:

Switch off the power, then switch on power again, immediately short press on/off key 3 times on the remote. The light blinks 3 times means match is successful.

Delete:

Switch off the power, then switch on power again, immediately short press on/off key 5 times on the remote. The light blinks 5 times means all matched remotes were deleted.

Malfunctions analysis & troubleshooting

Malfunctions	Causes	Troubleshooting
No light	<ol style="list-style-type: none"> 1. No power. 2. Wrong connection or insecure. 	<ol style="list-style-type: none"> 1. Check the power. 2. Check the connection.
Uneven intensity between front and rear, with voltage drop	<ol style="list-style-type: none"> 1. Output cable is too long. 2. Wire diameter is too small. 3. Overload beyond power supply capability. 4. Overload beyond controller capability. 	<ol style="list-style-type: none"> 1. Reduce cable or loop supply. 2. Change wider wire. 3. Replace higher power supply. 4. Add power repeater.
No response from the remote	<ol style="list-style-type: none"> 1. The battery has no power. 2. Beyond controllable distance. 3. The controller did not match the remote. 	<ol style="list-style-type: none"> 1. Replace battery. 2. Reduce remote distance. 3. Re-match the remote.

114466 | SYS-PRO SINGLECOLOR 1 ZONEN FERNBEDIENUNG + PWM-DIMMER, 1 KANAL, 12-24V DC 3A

Safety information

1. The product shall be installed and serviced by a qualified person.
2. The product is non-waterproof. Please avoid the sun and rain.
3. Good heat dissipation will prolong the working life of the controller. Please ensure good ventilation.
4. Please check if the output voltage of any power supplies used comply with the working voltage of the product.
5. Ensure all wire connections and polarities are correct and secure before applying power to avoid any damages to the LED lights.
6. If a fault occurs please return the product to your supplier. Do not attempt to fix this product by yourself.